



Bronze Valves

Bronze Valve Selection Guide & Figure Number Index

Catalog Page No.	Figure No.	Pressure Rating	Stem: RS or NRS	Bonnet/Cap: TB,UB, SC,UC	End Connections	Seat: IB or SS	Disc
1700 Series Bronze Valves							
8	1700	Class 125	RS	TB	THD	IB	SW
9	1700S	200 CWP	RS	TB	SLD	IB	SW
10	1701	Class 125	NRS	TB	THD	IB	SW
11	1701S	200 CWP	NRS	TB	SLD	IB	SW
12	1702	Class 125	RS	TB	THD	IB	PTFE
13	1702S	200 CWP	RS	TB	SLD	IB	PTFE
14	1703	Class 125	RS	TB	THD	IB	PTFE
15	1703S	200 CWP	RS	TB	SLD	IB	PTFE
16	1707	Class 125		TB	THD	IB	BRZ
17	1707S	200 CWP		TB	SLD	IB	BRZ
Bronze Gate Valves							
19	428	Class 125	RS	TB	THD	IB	SW
20	428UB	Class 125	RS	UB	THD	IB	SW
21	438	Class 125	NRS	TB	THD	IB	SW
22	1324	300 CWP	NRS	TB	SLD	IB	SW
23	431	Class 150	RS	TB	THD	IB	SW
24	431UB	Class 150	RS	UB	THD	IB	SW
25	437	Class 150	NRS	TB	THD	IB	SW
26	429	Class 150	NRS	TB	FLG	IB	SW
27	1320	200 CWP	NRS	TB	SLD	IB	SW
28	1330	200 CWP	RS	TB	SLD	IB	SW
29	422	Class 200	RS	UB	THD	IB	SW
30	424	Class 200	RS	UB	THD	SS	SW
31	426	Class 200	NRS	UB	THD	SS	SW
32	622E	Class 300	RS	UB	THD	IB	SW
33	634E	Class 300	RS	UB	THD	SS	SW
34	636E	Class 300	NRS	UB	THD	SS	SW
Bronze Globe Valves							
37	1	Class 125	RS	TB	THD	IB	BRZ
37	5TF	Class 125	RS	TB	THD	IB	PTFE
38	7TF	Class 150	RS	UB	THD	IB	PTFE
39	1310	300 CWP	RS	TB	SLD	IB	PTFE
40	14 ½P	Class 150	RS	UB	THD	SS	SS
41	212P	Class 200	RS	TB	THD	SS	SS
42	88	Class 200	RS	TB	THD	IB	Needle
43	382P	Class 300	RS	UB	THD	SS	SS
Bronze Angle Valves							
45	17TF	Class 150	RS	UB	THD	IB	PTFE
45	89	Class 200	RS	TB	THD	IB	Needle
46	384P	Class 300	RS	UB	THD	SS	SS
Bronze Swing Check Valves							
49	37	Class 125		SC	THD	IB	BRZ
49	41TF	Class 125		SC	THD	IB	PTFE
50	137	Class 150		SC	THD	IB	BRZ
51	1342	300 CWP		SC	SLD	IB	BRZ
52	141TF	Class 150		SC	THD	IB	PTFE
53	36	Class 200		SC	THD	IB	BRZ
54	1340	200 CWP		SC	SLD	IB	BRZ
55	76E	Class 300		SC	THD	IB	BRZ
Bronze Lift Check Valves							
56	29	Class 125		-	THD	IB	BRZ
57	27TF	Class 150		UC	THD	IB	PTFE
58	366E	Class 300		UC	THD	IB	BRZ

Cross Reference

BRONZE

GLOBE

Class 125	1
Class 300 SS Trim	212P

NIBCO

T-211-B
T-276AP

Milwaukee

502
593A

GATE

Class 125 RS-Thread	428
Class 125 NRS-Thread	438
Class 125 RS-Solder	1330

T-111	148
T-113	105
S-111	149

Class 125 NRS-Solder	1320
Class 150 Union Bonnet	431UB
Class 300 SS Trim	634E

S-113	115
T-134	1151
T-174-SS	1184

CHECK

Class 125 Thread	37
Class 125 Solder	1340
Class 300 Swing Check	76E
Class 300 Lift Check	366E

T-413-BY	509
S-413-B	1509
T-473-B	507
----	----

IRON

GATE

Class 125 NRS	461
Class 125 OS&Y	465 ½
Class 250 OS&Y	7.5E

NIBCO

F-619
F-617-0
F-667-0

Milwaukee

F2882 A
F2885 A
F2894 A

Powell

1787
1793
1797

Walworth

W719F
W726F
W786F

GLOBE

Class 125	351
-----------	-----

F-718-B

F2981 A

241

W906F

SWING CHECK

Class 125	373
-----------	-----

F-918-B

F2974 A

559

W928F

STOP CHECK

Class 250 Straight-way Y-Pattern	28E
Class 250 Angle Y-Pattern	30E

F-869-B

Advanced manufacturing techniques and equipment, ongoing engineering research and product development, skilled craftsman, and over fourteen decades of experience in flow control are behind the quality and dependability built into every product.

This catalog presents some of these products, namely: Crane's line of bronze gate, globe and check valves. The information is presented in a comprehensive manner and includes material, construction, rating, principal dimensions, and weight data.

Hydrostatic and Shock Pressures

valves are suitable for liquid working pressures specified on catalog pages only when used in hydraulic installations in which shock is absent or negligible. The sudden closure of a valve in a hydraulic system causes the body of liquid, which may be moving at a rate generally in excess of one foot per second, to stop instantaneously. As liquids are relatively incompressible, the sudden cessation of flow effects a rise in pressure considerably greater than the static working pressure. This pressure increase is termed "SHOCK" and may, in some cases, be sufficient to cause valves or piping to fail.

Pressure increase due to shock is not dependent upon the working pressure in the system but upon the velocity at which the liquid is flowing. This pressure surge, severely limits design velocities...a fact readily understandable if it is remembered that pressure rise resulting from arrest of flow may be as high as 60 psi for each foot per second initial velocity. For example, installations of 100 psi and 1000 psi working pressures, with the same initial velocity of 10 feet per second, will be subject to the same increase in pressure (approximately 600 psi) due to instantaneous closure of a valve.

Shock generally prevails in lines equipped with check or quick-closing valves, or in lines supplied by reciprocating pumps. It may also be produced, to a lesser degree, by rapid closure of gate and globe valves. Therefore, care should be exercised when choosing valves installed in liquid lines.

Where shock is likely to occur, the maximum shock pressure should be added to the working pressure of the line to determine working pressure products in the line...also, hydraulic installations should be equipped with air chambers or other types of shock absorbers to eliminate, as much as possible, increase due to shock.

Testing

Bronze valves described in this section meet or exceed the MSS SP-80 specifications for testing.

Materials

The selection of materials for components of valves is based upon expert metallurgical, engineering, foundry and fabrication knowledge as well as on many years of usage experience. Considerations affecting materials of parts which come in contact with the conveyed fluid include pressure, temperature and chemical composition of the fluid. The materials of moving parts that are subject to rubbing contact are selected on the basis of their resistance to wear, corrosion, seizing or galling, and on their frictional characteristics.

Utilization of materials to their full capability is assured by the use of stress analysis techniques that include extensive laboratory testing as well as the application of analytical theory. Stress levels for all materials used are maintained within the levels established by applicable codes, standards and specifications.

Illustrations & Weights

This catalog shows equivalent metric values to the customary imperial units. The "soft" conversion was arrived at by following MSS SP-86 guidelines.

Illustrations – Catalog illustrations are representative of a certain size of each line of product but do not necessarily represent all sizes in all details.

Material & design – We reserve the right to institute changes in materials, designs, dimensions and specifications without notice in keeping with our policy of continuing product development.

Weights – shown are approximate and are not guaranteed. They represent the average weight of Valves products as made from patterns in use at time weights were compiled.

Materials

Copper Alloys

CHEMICAL REQUIREMENTS (%) MECHANICAL PROPERTIES

	Copper	Tin	Lead	Iron	Nickel	Manganese	Aluminum	Zinc	Silicon	Other	Tensile Strength		Yield Strength		Elongation in 2" (50mm)
	Cu	Sn	Pb	Fe	Ni	Mn	Al	Zn	Si		ksi	MPa	ksi	MPa	(%)
STEAM OR VALVE BRONZE CASTINGS ASTM B61, C92200															
Min.	86.0	5.5	1.0					3.0			34	235	16	110	24
Max.	90.0	6.5	2.0	0.25	1.0		0.005	5.0	0.005	0.05*					
COMPOSITION BRONZE CASTINGS ASTM B62, C83600															
Min.	84.0	4.0	4.0					4.0			30	205	14	95	20
Max.	86.0	6.0	6.0	0.30	1.0		0.005	6.0	0.005	0.05*					
COPPER-ZINC SILICON ALLOY ROD ASTM B371, C69400															
Min.	80.0							remainder	3.5		80	550	40	250	15
Max.	83.0		0.30	0.20					4.5						
LEADED SEMI-RED BRASS ASTM B584, C84400															
Min.	78.0	2.3	6.0					7.0			29	200	13	90	18
Max.	82.0	3.5	8.0		1.0		0.005	10.0	0.005						
SILICONE BRASS CASTINGS ASTM B584, C87600															
Min.	88.0							4.0	3.5		60	414	30	207	16
Max.			0.50					7.0	5.5						
FREE CUTTING BRASS ROD/BAR ASTM B16, C36000, H02															
Min.	60.0		2.5					remainder			+	+	+	+	+
Max.	63.0		3.7	0.35						0.50**	+	+	+	+	+
NAVAL BRASS ROD ASTM B16, C48200, H02															
Min.	59.0	0.5	0.4					remainder			+	+	+	+	+
Max.	62.0	1.0	1.0	0.15						0.10***	+	+	+	+	+
ALUMINUM SILICONE BRONZE ROD ASTM B150, C64200															
Min.	87.5						6.3		1.5		+	+	+	+	+
Max.	92.5	0.20	0.05	0.30	0.25	0.10	7.6	0.50	2.2	0.50***	+	+	+	+	+
LEADED RED BRASS CONTINUOUS CASTINGS ASTM B505, C83600															
Min.	84.0	4.0	4.0					4.0			36	248	19	131	15
Max.	86.0	6.0	6.0	0.30	1.0		0.005	6.0	0.005						
BRASS PLATE/SHEET STRIP ASTM B36, C26000, H04															
Min.	68.5							remainder			71	489			
Max.	71.5		0.07	0.05							81	558			
BRASS WIRE ASTM B134, C26000, H02															
Min.	68.5							remainder			57	395			
Max.	71.5		0.07	0.05							67	460			
ALUMINUM SILICONE BRONZE FORGINGS ASTM B283, C64200															
Min.	88.7						6.3		1.5		+	+	+	+	+
Max.	90.1	0.20	0.05	0.30	0.25	0.10	7.6	0.50	2.2	0.15***	+	+	+	+	+
COPPER SILICON ALLOY ROD/BAR ASTM B98, C65100, H02															
Min.	96.0								0.80		55	379	20	138	11
Max.			0.05	0.08		0.7		1.5	2.00						
SEAMLESS COPPER WATER TUBE ASTM B88, C12200															
Min.	99.9										30	207			
Max.															

* Also may include maximum of 0.05% phosphorus.

** Maximum percent of elements permissible other than those indicated.

*** Also may include maximum of 0.15% arsenic.

+ Depends on diameter or thickness (surface to surface) of material: data on request.

Introduction to Ratings

- A) Ratings for Class 125, 150, 200 and 300 bronze valves are indicated on page 6 in this catalog:
- PSI Steam, Basic Rating; i.e., the nominal rated pressure of the valve.
 - PSI Cold Working Pressure; i.e., the maximum rated pressure of the valve at a temperature range of -20° to 150°F (-30° to 65°C).
- B) Ratings for Class 125 and 150 bronze valves equipped with non-metallic discs are indicated on the relevant catalog pages in this manner;
- PSI Saturated Steam; where "Saturated Steam" is the maximum rated pressure of the valve at the corresponding temperature of saturated steam.
 - PSI Cold Working Pressure; where "Cold Working Pressure" is the maximum rated pressure of the valve at a temperature range of -20°F to 150°F (-30°C to 65°C).

The full range of allowable pressures and temperatures for these valves is determined by referring to the pressure-temperature charts shown on page 6.

- C) Ratings for bronze valves falling outside Class 125, 150, 200 and 300 are indicated in various ways on the relevant catalog pages. The full range of allowable pressures and temperatures for these valves is determined by referring to the relevant catalog page.

General

All ratings represent the maximum allowable non-shock pressure at the indicated temperature. If the temperature is different from indicated, the allowable pressure may be interpolated.

Rating Temperature

The operating temperature of the valve is considered the temperature of the media flowing through it. This temperature must not exceed the maximum allowable temperature as stated in the pressure-temperature chart on page 6.

The safe pressure-temperature rating of a solder joint piping system is dependent, not only on valve, fitting and tubing strength but also on the composition of the solder used for joints. It shall be the responsibility of the user to select a solder composition that is compatible with the service conditions.

The safe pressure-temperature rating of valves fitted with non-metallic discs (some Globe, Angle Valves and Check Valves) is dependent upon the composition of the disc material. It shall be the responsibility of the user to specify the service application. PTFE discs are suitable for a maximum service temperature of 400°F (200°C), nitrile composition discs are suitable for a maximum service temperature of 200°F (90°C).

Adjusted Pressure/Temperature Ratings

Joints made of Copper Tube and Solder End Valves (pounds per square inch) Extracted from MSS SP-80

Solder used in joints	Service Temperature Degrees F	Water, including other noncorrosive liquids and gases			Saturated Steam (psig)
		Valve Sizes			Valves Sizes ¼" - 4"
		¼" - 1"	1 ¼" - 2"	2 ½" - 4"	
50-50 Tin-Lead (ASTM B-32, Alloy Grade 50-A)	100	200	175	150	-
	150	150	125	100	-
	200	100	90	75	-
	250	85	75	50	15
95-5 Tin-Antimony	100	500	400	300	-
	150	400	350	275	-
	200	300	250	200	-
	250	200	175	150	15

Bronze Valves Ratings

Pressure-Temperature Ratings

IMPERIAL UNITS						
Press. Class	125		150		200	300
End Conn.	THD	THD	FLG	THD	THD**	THD
Temp °F	PRESSURE – PSI NON-SHOCK					
	ASTM B-62			ASTM B-61		
-20 to 150	200	300	225	400	1000	600
200	185	270	210	375	920	560
250	170	240	195	350	830	525
300	155	210	180	325	740	490
350	140	180	165	300	650	450
400	–	–	–	275	560	410
406	125	150	150	–	–	–
450	120*	145*	–	250	480	375
500	–	–	–	225	390	340
550	–	–	–	200	300	300

METRIC UNITS						
Press. Class	125		150		200	300
End Conn.	THD	THD	FLG	THD	THD**	THD
Temp °C	PRESSURE – kPa NON-SHOCK					
	ASTM B-62			ASTM B-61		
-30 to 70	1380	2070	1550	2760	6890	4140
90	1280	1860	1450	2590	6340	3860
120	1170	1660	1340	2410	5720	3620
150	1070	1450	1240	2240	5100	3380
180	970	1240	1140	2070	4490	3100
200	–	–	–	1800	3860	2830
208	860	1030	1030	–	–	–
230	830*	1000*	–	1720	3310	2590
260	–	–	–	1550	2690	2340
290	–	–	–	1380	2070	2070

* Some codes (i.e. ASME BPVC, Section 1) limit the rating temperatures of the indicated material to 406°F (208°C).

** Alternative ratings for valve size 1/8" - 2" having threaded ends and union bonnet, when so indicated on the relevant catalogue pages.

Technical Data: Flow Data

The flow coefficient expresses flow rate in usg per minute of water at 60°F, with 1.0 psi pressure drop across the valve.

Bronze Gate Valves	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
All	–	8	8	16	36	60	90	140	270	470	680
Globe and Angle Valves											
17TF	–	1.6	3.1	5.1	9.2	16	28	39	66	–	–
382P	–	1.1	2.1	3.3	6.0	10	18	26	44	64	100
384P	–	1.5	3.0	4.9	9.0	15	27	38	64	–	–
1310	–	–	2.1	3.8	5.9	11	21	28	49	–	–
7TF, 14 1/2P, 212P	–	1.3	2.4	3.9	7.0	12	21	30	50	74	115
Check Valves											
29	–	1.3	2.5	4.1	7.6	13	23	31	54	78	125
27TF	–	0.9	1.8	3.0	5.4	9	16	22	39	–	–
366E	–	1.1	2.1	3.3	6.0	10	18	26	44	64	100
76E, 137, 1342, 141TF	–	2.3	4.3	7.2	13	22	39	56	92	135	215
Miscellaneous											
88, 89	0.3	0.6	1.1	1.9	3.4	–	–	–	–	–	–

Light Industrial Series

Quality and Performance in a Competitively Priced Bronze Line


The line of Class 125 bronze valves is designed and priced to meet the needs of today's competitive business environment. This complete line of gate, globe and check valves conforms to the specifications set by the Manufacturers Standardization Society (MSS).*

Perfectly suited for many industrial applications, these valves are manufactured to exacting specifications and quality standards. Rigid quality control during and after manufacture is your assurance that you'll get a perfect valve every time.


Engineered to the design and quality standards of the Manufacturers Standardization Society (MSS)

- Economically priced
- Uncompromising quality
- Distributor stocking to reduce your costs
- Application assistance from trained representatives
- Backed by product performance warranty


*All valves conform to MSS SP-80.
Thread ends conform to ASME B1.20.1
Solder joint ends conform to ASME B16.18.

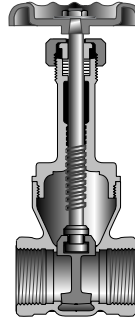


Rising Stem Gate
Threaded

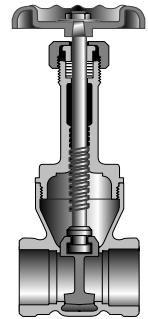


Rising Stem Gate
Solder End

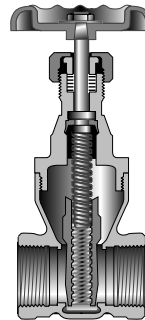


Non-Rising Stem Gate
Threaded

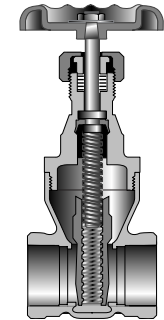


Non-Rising Stem Gate
Solder End

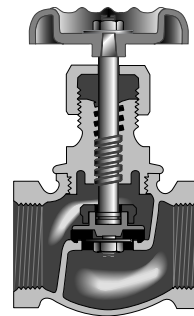


Globe, Screwed

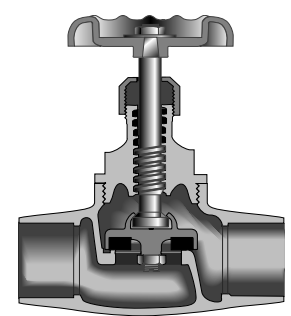

Globe, Solder Joint

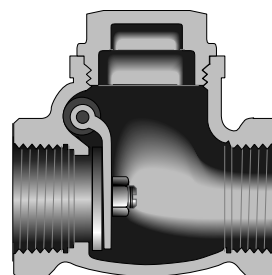


Check, Bronze Disc, Threaded

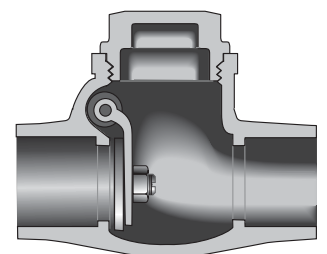

Check, Bronze Disc, Solder End

Figure 1707 1700 Series Bronze Check Valve

Class 125 • Bronze Cap • Brass/Bronze Disc • Threaded Ends

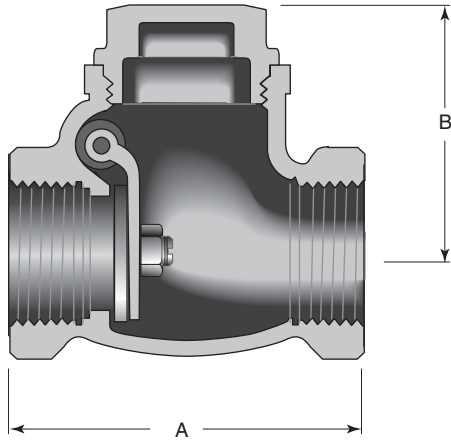

Features

- T-Pattern Swing Check.
- Free-to-rotate bronze disc closes in a different position on the integral seat each time it operates.
- Always install with pressure under the disc in vertical or horizontal position. An arrow cast on the body indicates the correct direction of flow.
- Threaded Ends
- MSS SP-80, Type 3

For more detailed features, refer to page 7.

Figure 1707

Size Range:

¼" through 3"

Working Pressures Non-Shock:

125 psi Steam, Basic Rating

200 psi Cold Working Pressure

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body	All	Bronze	B62 C83600
Cap	All	Bronze	B16 C83600
Disc	¼" - ¾"	Bronze	B16 alloy 360
Disc	1" - 3"	Bronze	B62 C83600

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	¼ (6)	⅜ (10)	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)	2 ½ (65)	3 (80)
A	2.12 (54)	2.12 (54)	2.60 (66)	2.76 (70)	3.27 (83)	3.78 (96)	4.25 (108)	5.04 (128)	6.30 (160)	7.08 (180)
B	1.50 (38)	1.50 (38)	1.77 (45)	1.93 (49)	2.28 (58)	2.56 (65)	2.86 (73)	3.50 (89)	4.25 (108)	4.84 (123)
WTS.	0.70 (0.32)	0.70 (0.32)	0.80 (0.36)	1.00 (0.45)	1.40 (0.63)	2.70 (1.22)	2.90 (1.31)	4.40 (1.98)	7.60 (3.42)	9.30 (4.19)

200 CWP • Bronze Cap • Brass/Bronze Disc • Solder Ends

Figure 1707S

Size Range:


3/8" through 3"

Working Pressures Non-Shock:

200 psi Cold Working Pressure

Features

- T-Pattern Swing Check.
- Free-to-rotate bronze disc closes in a different position on the integral seat each time it operates.
- Screwed Cap
- Solder Joint Ends
- Always install with pressure under the disc in vertical or horizontal position. An arrow cast on the body indicates the correct direction of flow.
- MSS SP-80, Type 3

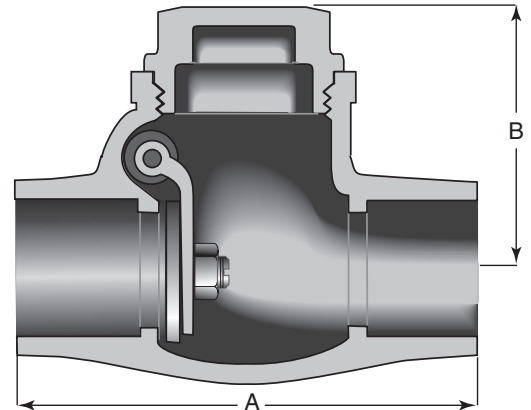

Caution: Before installing solder-joint valves, be sure the solder or brazing alloy is compatible with the fluid media and the alloy melting point is high enough to withstand the pressure and temperature conditions. See page 5 for adjusted pressure/temperature ratings.

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body	All	Bronze	B62 C83600
Cap	All	Bronze	B16 C83600
Disc	3/8" - 3/4"	Bronze	B16 alloy 360
Disc	1" - 3"	Bronze	B62 C83600

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	3/8 (10)	1/2 (15)	3/4 (20)	1 (25)	1 1/4 (32)	1 1/2 (40)	2 (50)	2 1/2 (65)	3 (80)
A	2.28 (58)	2.60 (66)	3.23 (82)	3.86 (98)	4.49 (114)	5.12 (130)	6.14 (156)	7.25 (184)	8.07 (205)
B	1.50 (38)	1.77 (45)	1.93 (49)	2.28 (58)	2.56 (65)	2.86 (73)	3.50 (89)	4.25 (108)	4.84 (123)
WTS.	0.60 (0.27)	0.80 (0.36)	0.90 (0.41)	1.40 (0.63)	2.50 (1.13)	2.80 (1.26)	4.20 (1.90)	7.20 (3.25)	8.80 (3.97)

Detailed Features

Check valves permit flow in one direction only and close automatically when flow reverses. They are entirely automatic in action, depending upon pressure and velocity of flow within the line to perform their functions of opening and closing.

The discs and any associated moving parts may be in a constant state of movement if the velocity pressure is not sufficient to hold the disc in a wide open and stable position. Premature wear and noisy operation or vibration can be avoided by selecting the size of the check valve on the basis of flow conditions rather selecting the check valve according to the size of the pipeline.

Each valve in this section is classified by its pressure rating. All valves designated as Class 125, 150, 200 or 300 comply with MSS SP-80 Standard Practice.

Horizontal Lift Check Valves have an internal construction similar to globe valves. The flow follows a turning course through a horizontal bridge wall on which the disc is seated. The disc is equipped with guides either above or below the seat which move vertically in integral guides in the cap and bridge wall. The disc is seated by backflow or by gravity when there is no flow. It operates in horizontal lines only, the disc being free to rise and fall depending on the pressure under it.

Vertical Lift Check Valves are designed to operate on upward flow only. They must always be installed vertically with pressure below the seat. The disc is seated by backflow or by gravity when there is no flow.

Swing Check Valves with straight-through body design and wide hinge support provide turbulence-free flow and accurate seating. There is no tendency for the seating surfaces to gall or score because the disc meets the flat seat squarely without rubbing. Also, some types of swing check valves are furnished with soft faced discs backed

up by sold metal which provides even more positive seating.

Below are two formulas that can be used to determine the minimum velocity necessary to hold a check valves in a wide open and stable position. v is equal to velocity in feet per second and V is the specified volume of fluid in cubic feet per pound.

$$\text{Swing Check Formula } v = \beta^{2.35} \sqrt{V}$$

$$\text{Lift Check Formula } v = \beta^{2.40} \sqrt{V}$$

$$\text{where } \beta^2 = \left(\frac{\text{Port Diameter}}{\text{Nominal Pipe Diameter}} \right)^2$$

Sizing check valves on this basis may often result in the use of valves that are smaller than the pipe in which they are used, necessitating the use of reducers for installation. The pressure drop will be no greater than that of a larger valve that is partially open. Valve life will be greatly extended, and the added bonus, of course, is the lower cost of the smaller valves.

Superior Features

Positive Seating - The 45° seat angle in relation to direction of flow and the two piece swivel disc combine to provide full seating whether installed horizontally or vertically, regardless of pipeline pitch. Seat leakage from hinge distortion is virtually eliminated. For installations requiring it, the composition disc versions give the extra positive shut-off inherent in a soft seating disc.

Longer Life - The sturdy, sensible body design will give years of satisfactory service under rugged operating conditions. The swivel hinge-disc connection permits the disc to rotate in service, virtually eliminating concentrated or "spot" seat wear. Easy seat regrinding or composition disc

replacement adds years to the service life of these valves.


Easy Maintenance - Easy access via the large cap and the Y pattern body permits quick regrinding of the seating surfaces on the metal seated valves by means of the rotating disc. Similarly, it is quick and easy to replace discs on the composition disc valves. By removing the hinge pin plug, hinge pin and cap, the hinge-disc assembly can be removed to permit replacing the disc.

Parts Interchangeability - Among class 125, 150, 200 and 300 swing check valves, the disc and hinge assembly is fully interchangeable; metal or composition disc seating valves have this great advantage of using the same disc/hinge assembly within their respective seating categories.


Body is made of bronze conforming to requirements of ASTM B62 or B61 depending on valve pressure class. Like all parts, bodies are designed to withstand high internal pressures and line strains... and are proportioned to assure a high safety factor under recommended working pressures.

Disc and hinge are made from high grade materials especially selected to perform dependably in the services for which the valve is recommended.

SWING CHECK VALVE

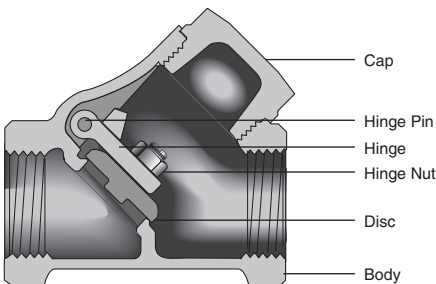

HORIZONTAL LIFT CHECK VALVE

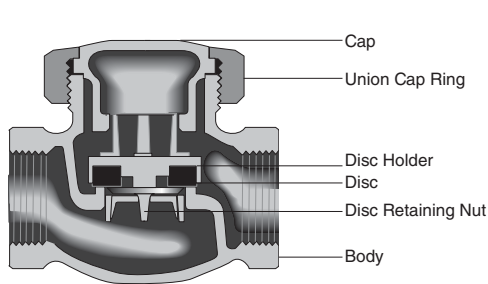

VERTICAL LIFT CHECK VALVE


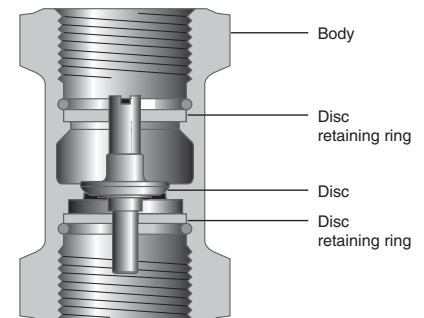


Figure 37 Bronze Swing Check Valve

Class 125 • Threaded Cap • Brass/Bronze Disc • Threaded Ends

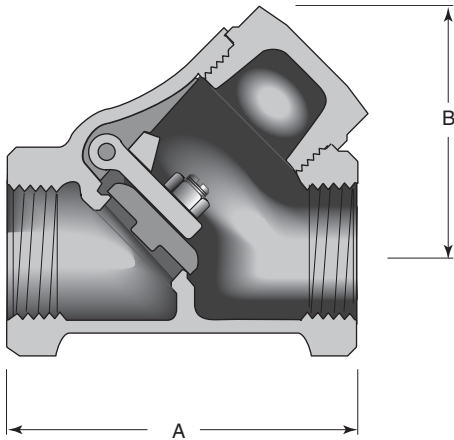

Features

- Y-Pattern Body with Integral Seat
- Seat can be reground while the valve remains in the line
- Threaded Ends
- Always install with pressure under the disc in vertical or horizontal position. An arrow cast on the body indicates the correct direction of flow.
- Screwed Cap
- MSS Specification SP-80

Figure 37

Size Range:

¼" through 3"

Working Pressures Non-Shock:

125 psi Steam, Basic Rating

200 psi Cold Working Pressure

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body	All	Bronze	B62 alloy C83600
Cap	All	Bronze	B61 alloy C92200
Disc	¼"-¾"	Brass	B16 H02
Disc	1" - 3"	Bronze	B61 alloy C92200
Hinge	All	Bronze	B584 alloy C87600
Hinge pin	All	Stainless Steel	18-8

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	¼ (6)	⅜ (10)	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)	2 ½ (65)	3 (80)
A	2.18 (55)	2.18 (55)	2.19 (56)	2.75 (70)	3.24 (82)	3.84 (98)	4.40 (112)	5.18 (132)	6.13 (156)	7.40 (188)
B	1.50 (38)	1.50 (38)	1.63 (41)	1.91 (49)	2.50 (64)	2.90 (74)	3.42 (87)	4.19 (106)	5.09 (129)	5.95 (151)
WTS.	0.60 (0.27)	0.60 (0.27)	0.70 (0.32)	1.10 (0.50)	1.80 (0.82)	2.60 (1.18)	3.90 (1.77)	6.10 (2.77)	10.30 (4.67)	15.10 (6.85)

Bronze Swing Check Valve Figure 41TF

Class 125 • Threaded Cap • PTFE Disc • Threaded Ends

Figure 41TF

Size Range:

½" through 2"

Working Pressures Non-Shock:


125 psi Steam, Basic Rating

200 psi Cold Working Pressure

Features

- Recommended for non-shock water, oil or gas.
- Threaded Ends
- Screwed Cap
- Y-Pattern Body
- PTFE Disc
- Always install with pressure under the disc in vertical or horizontal position. An arrow cast on the body indicates the correct direction of flow.
- MSS Specification SP-80

For more detailed features, refer to page 47.

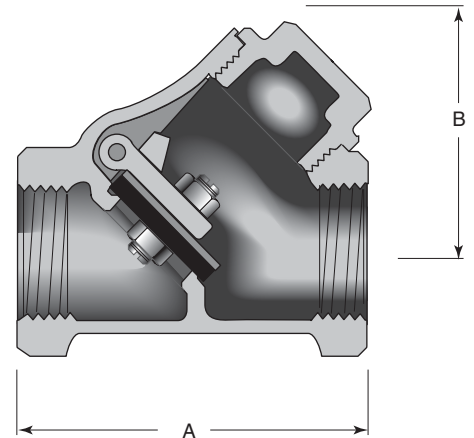

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body	All	Bronze	B62 alloy C83600
Cap	All	Bronze	B61 alloy C92200
Disc	All	PTFE w/metal holder	—
Hinge	All	Bronze	B584 alloy 87600
Hinge pin	All	Stainless Steel	18-8


Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	½	¾	1	1 ¼	1 ½	2
	(15)	(20)	(25)	(32)	(40)	(50)
A	2.19 (56)	2.75 (70)	3.23 (82)	3.84 (98)	4.40 (112)	5.18 (132)
B	1.64 (42)	1.92 (49)	2.45 (62)	2.86 (73)	3.42 (87)	4.13 (105)
WTS.	0.70 (0.32)	1.10 (0.50)	1.80 (0.82)	2.60 (1.18)	3.90 (1.77)	6.20 (2.81)

Figure 137 Bronze Swing Check Valve

Class 150 • Threaded Cap • Brass/Bronze Disc • Threaded Ends

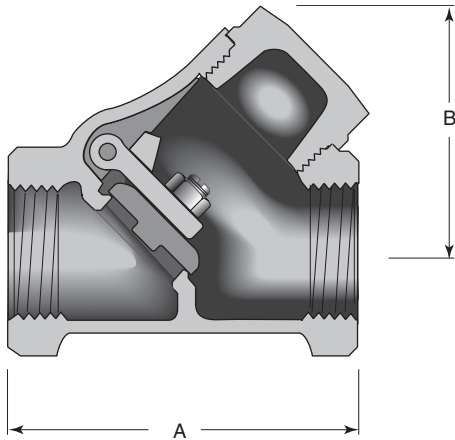

Features

- Y-Pattern Body
- Threaded Ends
- Free to rotate disc design allows the disc to close in a different position on the integral seat each time it operates.
- Regrindable Seat
- Always install with pressure under the disc in vertical or horizontal position. An arrow cast on the body indicates the correct direction of flow.
- Screwed Cap
- MSS Specification SP-80

Figure 137

Size Range:

¼" through 3"

Working Pressures Non-Shock:

150 psi Steam, Basic Rating

300 psi Cold Working Pressure

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body	All	Bronze	B62 alloy C83600
Cap	All	Bronze	B61 alloy C92200
Hinge	All	Bronze	B584 alloy C87600
Disc	¼" - ¾"	Brass	B16 H02
Disc	1" - 3"	Bronze	B61 alloy C92200
Hinge Pin	All	Stainless Steel	18-8

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	¼ (6)	⅜ (10)	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)	2 ½ (65)	3 (80)
A	2.18 (55)	2.18 (55)	2.19 (56)	2.75 (70)	3.24 (82)	3.84 (98)	4.40 (112)	5.18 (132)	6.13 (156)	7.40 (188)
B	1.50 (38)	1.50 (38)	1.63 (41)	1.91 (49)	2.50 (64)	2.90 (74)	3.42 (87)	4.19 (106)	5.09 (129)	5.95 (151)
WTS.	0.60 (0.27)	0.60 (0.27)	0.70 (0.32)	1.10 (0.50)	1.80 (0.82)	2.60 (1.18)	3.90 (1.77)	6.10 (2.77)	10.30 (4.67)	15.10 (6.85)

300 CWP • Threaded Cap • Brass/Bronze Disc • Solder Ends

Figure 1342

Size Range:

½" through 3"

Working Pressures Non-Shock:


300 psi Cold Working Pressure

Features

- Y-Pattern Body
- Solder Joint Ends
- Always install with pressure under the disc in vertical or horizontal position. An arrow cast on the body indicates the correct direction of flow.
- Screwed Cap
- MSS Specification SP-80

For more detailed features, refer to page 47.

Caution: Before installing solder-joint valves, be sure the solder or brazing alloy is compatible with the fluid media and the alloy melting point is high enough to withstand the pressure and temperature conditions. See page 5 for adjusted pressure/temperature ratings.

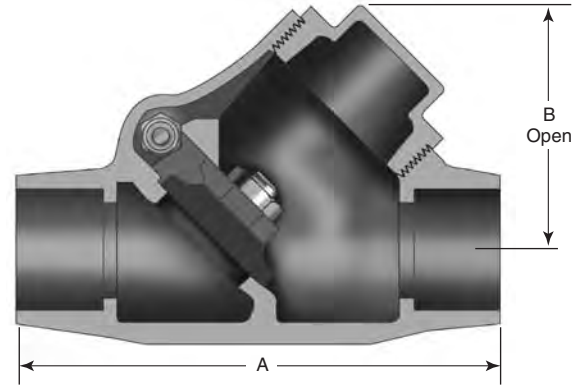

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body	All	Bronze	B62 alloy C83600
Cap	All	Bronze	B61 alloy C92200
Disc	½" - ¾"	Brass	B16 H02
Disc	1" - 3"	Bronze	B61 alloy C92200
Hinge	All	Bronze	B584 alloy C87600
Hinge Pin	All	Stainless Steel	18-8

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)


	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)	2 ½ (65)	3 (80)
A	2.70 (69)	3.61 (92)	4.25 (108)	4.82 (122)	5.60 (142)	6.86 (174)	7.78 (198)	9.31 (236)
B	1.61 (41)	1.92 (49)	2.50 (64)	2.84 (72)	3.47 (88)	4.17 (106)	5.00 (127)	5.90 (150)
WTS.	0.70 (0.32)	1.10 (0.50)	1.80 (0.82)	2.50 (1.13)	4.10 (1.86)	6.40 (2.90)	10.60 (4.81)	15.90 (7.21)

Bronze Swing Check Valve



Figure 141TF

Class 150 • Threaded Cap • PTFE Disc • Threaded Ends

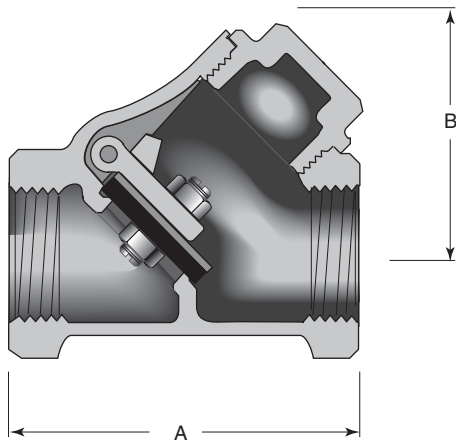

Features

- Y-Pattern Body
- Threaded Ends
- PTFE Disc
- Screwed Cap
- MSS Specification SP-80

Figure 141TF

Size Range:

½" through 2"

Working Pressures Non-Shock:

150 psi Steam, Basic Rating

300 psi Cold Working Pressure

Principal Parts & Materials

Part	Material	ASTM
Body	Bronze	B62 alloy C83600
Cap	Bronze	B61 alloy C92200
Hinge	Bronze	B584 alloy C87600
Disc	PTFE w/metal holder	—
Hinge Pin	Stainless Steel	18-8

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)
A	2.19 (56)	2.75 (70)	3.23 (82)	3.84 (98)	4.40 (112)	5.18 (132)
B	1.64 (42)	1.92 (49)	2.45 (62)	2.86 (73)	3.42 (87)	4.13 (105)
WTS.	0.70 (0.32)	1.10 (0.50)	1.80 (0.82)	2.60 (1.18)	3.90 (1.77)	6.20 (2.81)

Class 200 • Threaded Cap • Brass/Bronze Disc • Threaded Ends

Figure 36

Size Range:

¼" through 3"


Working Pressures Non-Shock:

200 psi Steam, Basic Rating

400 psi Cold Working Pressure

Features

- Y-Pattern Body
- Threaded Ends
- Screwed Cap
- Rotating disc virtually eliminates "spot" seat wear.
- Always install with pressure under the disc in vertical or horizontal position. An arrow cast on the body indicates the correct direction of flow.
- MSS Specification SP-80

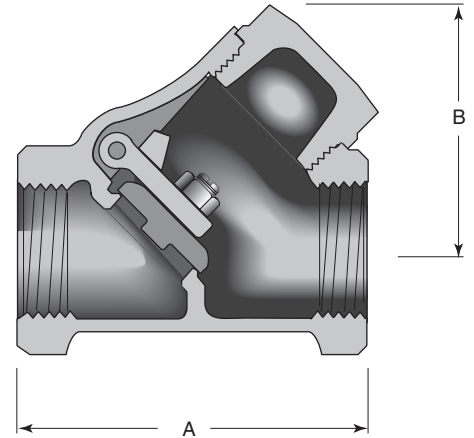

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body & cap	All	Bronze	B61 alloy C92200
Hinge	All	Bronze	B584 alloy C87600
Disc	¼" - ¾"	Brass	B16 H02
Disc	1" - 3"	Bronze	B61 alloy C92200
Hinge Pin	All	Stainless Steel	18-8

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	¼ (6)	⅜ (10)	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)	2 ½ (65)	3 (80)
A	2.18 (55)	2.18 (55)	2.19 (56)	2.75 (70)	3.21 (82)	3.87 (98)	4.40 (112)	5.18 (132)	6.94 (176)	8.25 (210)
B	1.52 (39)	1.52 (39)	1.67 (42)	1.95 (50)	2.55 (65)	3.01 (76)	3.40 (86)	4.30 (109)	4.69 (119)	5.97 (152)
WTS.	0.60 (0.27)	0.60 (0.27)	0.80 (0.36)	1.20 (0.54)	1.90 (0.86)	2.70 (1.22)	4.30 (1.95)	7.10 (3.22)	13.90 (6.30)	21.60 (9.80)

Bronze Swing Check Valve

Figure 1340



200 CWP • Threaded Cap • Brass/Bronze Disc • Solder Ends

Features

- Y-Pattern Body
- Solder Joint Ends
- Screwed Cap
- MSS Specification SP-80, Type 3


Figure 1340

Size Range:

½" through 3"

Working Pressures Non-Shock:

200 psi Cold Working Pressure

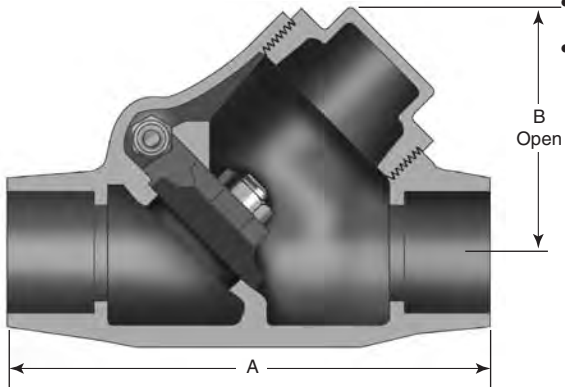

Principal Parts & Materials

Part	Size	Material	ASTM
Body	All	Bronze	B62 alloy C83600
Cap	All	Bronze	B61 alloy C92200
Disc	½"–¾"	Brass	B16 alloy H02
Disc	1"–3"	Bronze	B62 alloy C83600
Hinge	All	Bronze	B584 alloy C87600
Hinge Pin	All	Stainless Steel	A276 type 304

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)	2 ½ (65)	3 (80)
A	2.69 (68)	3.63 (92)	4.25 (108)	4.81 (122)	5.56 (141)	6.87 (174)	7.78 (198)	9.19 (233)
B	1.63 (41)	2.00 (51)	2.50 (62)	3.00 (76)	3.50 (89)	4.00 (102)	4.75 (121)	5.63 (143)
WTS.	0.60 (0.27)	1.00 (0.45)	1.50 (0.68)	2.20 (1.00)	3.30 (1.50)	5.40 (2.45)	9.20 (4.17)	14.30 (6.49)

Class 300 • Threaded Cap • Brass/Bronze Disc • Threaded Ends

Figure 76E

Size Range:

¼" through 3"

Working Pressures Non-Shock:

300 psi Steam, Basic Rating

1000 psi Cold Working Pressure


¼" to 2" - (6mm - 50mm)

600 psi Cold Working Pressure

2 ½" to 3" - (65mm - 80mm)

Features

- Y-Pattern Body
- Threaded Ends
- Regrindable Seat
- Screwed Cap
- Always install with pressure under the disc in vertical or horizontal position. An arrow cast on the body indicates the correct direction of flow.
- MSS Specification SP-80

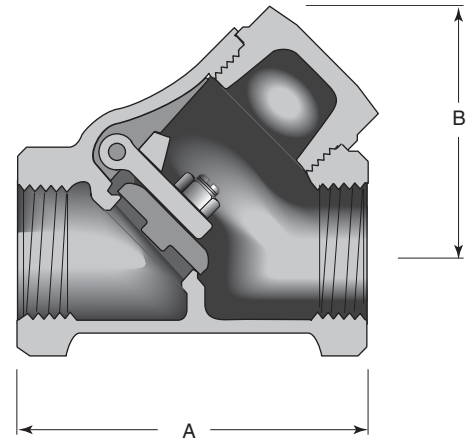

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body & cap	All	Bronze	B61 alloy C92200
Hinge	All	Bronze	B584 alloy C87600
Disc	¼" - ¾"	Brass	B16 H02
Disc	1" - 3"	Bronze	B61 alloy C92200
Hinge Pin	All	Stainless Steel	18-8

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)


	¼ (6)	⅜ (10)	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)	2 ½ (65)	3 (80)
A	2.18 (55)	2.18 (55)	2.19 (56)	2.72 (69)	3.23 (82)	3.83 (97)	4.40 (112)	5.16 (131)	6.94 (176)	8.25 (210)
B	1.52 (39)	1.52 (39)	1.67 (42)	1.95 (50)	2.55 (65)	3.01 (76)	3.40 (86)	4.30 (109)	4.69 (119)	5.97 (152)
WTS.	0.60 (0.27)	0.60 (0.27)	0.80 (0.36)	1.20 (0.54)	1.90 (0.86)	2.70 (1.22)	4.30 (1.95)	7.10 (3.22)	13.90 (6.30)	21.60 (9.80)

Bronze Vertical Lift Check Valve

Figure 29



Class 125 • Brass/Bronze Disc • Threaded Ends

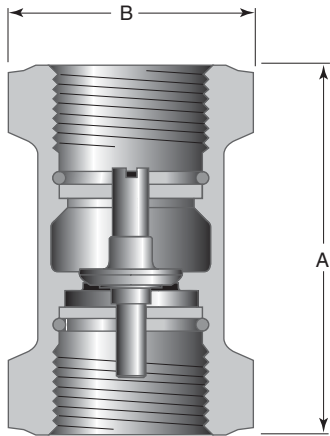

Features

- These lift check valves have a one piece body with a bronze disc. The design is conceived for operation on upward flow only. Always install vertically with pressure below the seat and inlet end down.
- Seats are integral with body. Disc is precisely guided at top and bottom, assuring accurate seating.
- Excellent choke for suction lines and general service
- MSS Specification SP-80

Figure 29

Size Range:

¼" through 3"

Working Pressures Non-Shock:

125 psi Steam, Basic Rating

200 psi Cold Working Pressure

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body	All	Bronze	B62 C83600
Disc	¼" - ½"	Brass	B36 C-2600 H04
Disc	¾"	Bronze	B505 C83600
Disc	1" - 2"	Bronze	B62 C83600
Disc guide	All	Brass	B36 C26000 H04
Retaining ring	All	Brass	B134 C26000

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	¼ (6)	⅜ (10)	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)	2 ½ (65)	3 (80)
A	1.96 (50)	1.96 (50)	2.15 (55)	2.32 (59)	2.90 (74)	3.28 (83)	3.60 (91)	4.00 (102)	5.00 (127)	5.42 (138)
B	1.08 (27)	1.08 (27)	1.26 (32)	1.54 (39)	1.87 (47)	2.36 (60)	2.58 (66)	3.24 (82)	3.94 (100)	4.74 (120)
WTS.	0.30 (0.14)	0.30 (0.11)	0.40 (0.16)	0.50 (0.23)	0.90 (0.41)	1.50 (0.68)	2.10 (0.93)	3.10 (1.38)	6.30 (2.86)	8.60 (3.88)

Bronze Horizontal Lift Check

Figure 27TF



Class 150 • Union Cap • PTFE Disc • Threaded Ends

Figure 27TF

Size Range:

¼" through 2"

Working Pressures Non-Shock:

150 psi Steam, Basic Rating


300 psi Cold Working Pressure

Features

- Lift Check Design
- Threaded Ends
- Union Cap
- Disc holder is guided top and bottom on sizes ½" and larger
- PTFE disc
- MSS Specification SP-80

Note:

For horizontal installation only.

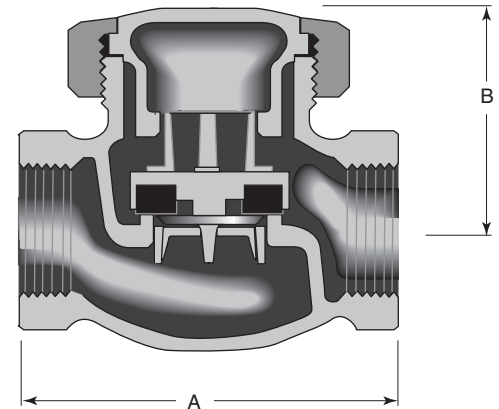

Principal Parts & Materials

Part	Sizes	Material	ASTM
Body, cap & union ring	All	Bronze	B62 alloy C83600
Disc	All	PTFE w/metal holder	—

Dimensions and Weights

Inches (millimeters) - pounds (kilograms)

	¼ (6)	⅜ (10)	½ (15)	¾ (20)	1 (25)	1 ¼ (32)	1 ½ (40)	2 (50)
A	1.96 (50)	1.96 (50)	2.62 (67)	2.95 (75)	3.50 (89)	4.11 (104)	4.59 (117)	5.74 (146)
B	1.32 (34)	1.28 (33)	1.56 (40)	1.89 (48)	2.29 (58)	2.66 (68)	2.87 (73)	3.32 (84)
WTS.	0.50 (0.23)	0.50 (0.23)	1.00 (0.43)	1.50 (0.68)	2.30 (1.04)	3.60 (1.63)	5.30 (2.38)	8.90 (4.04)